Crosswise Convection Gas Convection Oven, 20 GN2/1

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



260704 (FCG202)

Gas Convection Oven 20x2/1GN, crosswise

Short Form Specification

Item No.

Main structure in stainless steel, with seamless joints in the oven cavity. Double-glazed door with tempered glass. Cavity lighting. Unique airflow channel system. Atmospheric burner.

Cooking cycles: air convection, convection with 5 stage humidification. Max. temperature of 300°C.

Functional level: base, manual,

"Cross-wise" pan rack suitable for 20x2/1GN or 40x1/1GN.

Supplied with n. 1 roll-in rack, 60mm pitch, and n. 2 roll-in rack slides.

Main Features

- Racks can be easily removed without the need for special tools.
- Unique air-flow system guarantees perfect distribution of heat throughout the oven cavity.
- Maximum temperature of 300°C.
- Food temperature probe available accessory.
- Rapid cooling of oven cavity.
- Halogen lighting and "crosswise" pan supports allow clear and unobstructed view of the products being cooked.
- 5 Stage humidification control, to ensure perfect pastries and succulent roasts.
- Meets the requirements of CE, VDE and DVGW for safety.

Construction

- Access to all components from the front.
- Stainless steel oven cavity with rounded
- Double-glazed door with tempered glass.
- External access door for electrical connections.
- All connections made on the left side below the oven.
- Integrated drain outlet.
- IPx4 water protection.

Included Accessories

• 1 of 60mm pitch roll-in rack for PNC 922204 20x2/1GN

Optional Accessories

- Water softener with salt for ovens PNC 921305 with automatic regeneration of resin \Box
- Resin sanitizer for water softener PNC 921306 (921305)
- Fat filter for gas 10 and 20 1/1 and PNC 921700 2/1 GN ovens (2 filters are necessary for 20-grid ovens)
- Probe for ovens 20x1/1 and 2/1GN PNC 921704
- PNC 921712 Flue condenser for gas ovens 20x2/1GN • Trolley for 20x2/1GN roll-in rack PNC 922134
- Base for 20x2/1GN roll-in rack PNC 922142
- External side spray unit (needs to bePNC 922171 mounted outside and includes
- support to be mounted on the oven) PNC 922173 Pair of baking tray support
- Pair of AISI 304 stainless steel grids, PNC 922175 GN 2/1








Crosswise Convection Gas Convection Oven, 20 GN2/1

• 60mm pitch roll-in rack for 20x2/1GN	PNC 922204 ☐
• 80mm pitch roll-in rack for 20x2/1GN	PNC 922206 ☐
• Pair of frying baskets	PNC 922239 ☐
 Kit universal skewer rack and 6 short skewers for Lengthwise and Crosswise ovens 	PNC 922325 □
Universal skewer rack	PNC 922326 ☐
• 6 short skewers	PNC 922328 ☐
 Smoker for lengthwise and crosswise oven (4 kinds of smoker wood chips are available on request) 	PNC 922338 □





Crosswise Convection Gas Convection Oven, 20 GN2/1

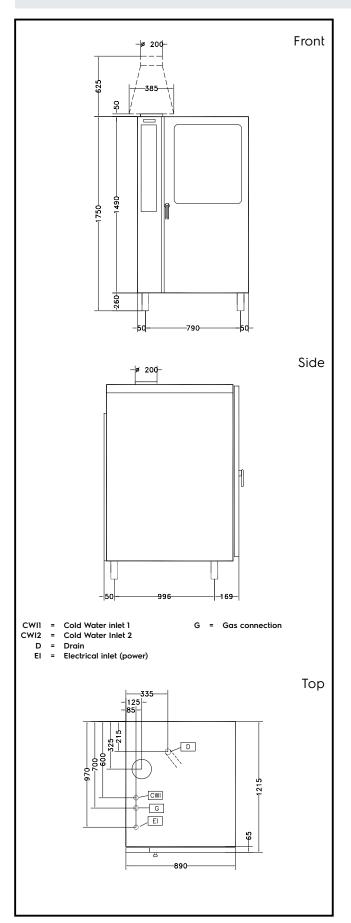

Electric

Supply voltage:

260704 (FCG202) 220-230 V/1 ph/50 Hz

Auxiliary: 1 kW 1 kW

Electrical power max.:

Gas

Gas Power: 50 kW

Capacity:

Shelf capacity: 20

Key Information:

External dimensions, Width: 890 mm External dimensions, Height: 1700 mm External dimensions, Depth: 1215 mm 311.8 kg Net weight: 80/0 mm Height adjustment: Functional level: Basic

Type of grids: 2/1 Gastronorm

Runners pitch: 60 mm

Cooking cycles - air-convection: 300 °C 590 mm Internal dimensions, width: Internal dimensions, depth: 760 mm Internal dimensions, height: 1350 mm



Crosswise Convection Gas Convection Oven, 20 GN2/1