



Electrolux

Modular Cooking Range Line 700XP 2 Drawer Refrigerated Base

ITEM # _____

MODEL # _____

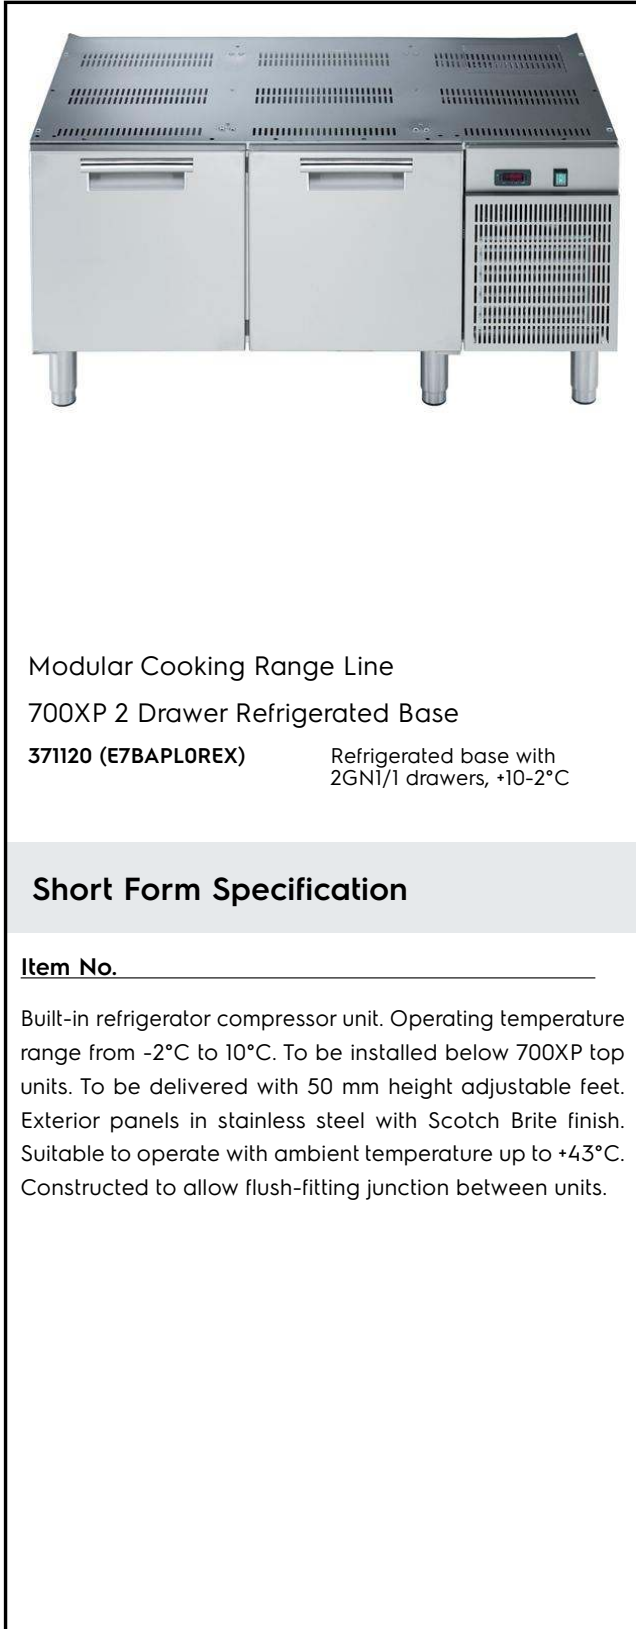
NAME # _____

SIS # _____

AIA # _____



Electrolux



Modular Cooking Range Line
700XP 2 Drawer Refrigerated Base

371120 (E7BAPLOREX) Refrigerated base with
2GN1/1 drawers, +10-2°C

Short Form Specification

Item No. _____
Built-in refrigerator compressor unit. Operating temperature range from -2°C to 10°C. To be installed below 700XP top units. To be delivered with 50 mm height adjustable feet. Exterior panels in stainless steel with Scotch Brite finish. Suitable to operate with ambient temperature up to +43°C. Constructed to allow flush-fitting junction between units.

Main Features

- Unit can be easily installed below other 700 line top models.
- Unit delivered with 50 mm height adjustable feet in Stainless steel.
- Suitable for use in ambient temperatures of up to 43 °C.
- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Anti-tilt runners accept GN 1/1 containers.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Right angled side edges eliminate gaps and possible dirt traps between units.

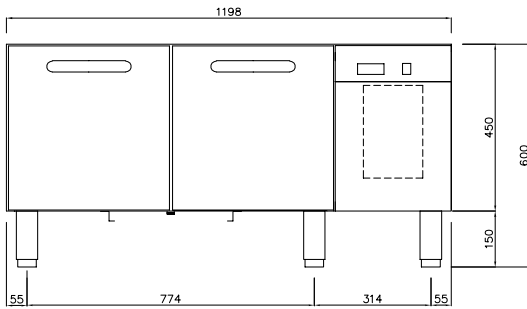
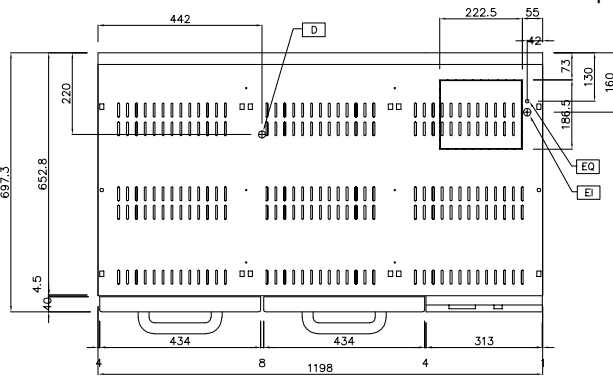
Construction

- Exterior panels in Stainless steel with Scotch Brite finish to meet the highest hygiene standards.
- Built-in compressor to suit operating conditions.
- Access to all components from the front.
- CFC free (ecological refrigerant type: R404a, - gas in foam: cyclopentane).


Optional Accessories

- Kit 4 wheels - 2 swivelling with brake - it is mandatory to install base support and wheels PNC 206135
- Frontal kicking strip, 1200mm (not for refr-freezer base) PNC 206178
- Base support for feet or wheels - 800mm (700/900) PNC 206367
- Base support for feet or wheels - 1200mm (700/900) PNC 206368
- Base support for feet or wheels (lateral) for pastacooker PNC 206371
- Rear paneling - 1200mm (700/900) PNC 206376

APPROVAL: _____

Front

Top


D = Drain EQ = Equipotential screw
EI = Electrical connection

Side

Electric

Supply voltage:	
371120 (E7BAPLOREX)	230 V/1N ph/50 Hz
Electrical power:	0.5 kW
Total Watts:	0.5 kW

Key Information:

External dimensions, Height:	600 mm
External dimensions, Width:	1200 mm
External dimensions, Depth:	700 mm
Gross capacity:	152 lt
Net weight:	95 kg
Shipping weight:	116 kg
Shipping height:	820 mm
Shipping width:	800 mm
Shipping depth:	1300 mm
Shipping volume:	0.85 m ³

Refrigeration Data

Refrigerant type:	R404a
Refrigeration power:	510 W
Refrigerant weight:	400 g