



Electrolux

**Digital Undercounter  
Concept Counter Refrigerator - 265  
lt, 2 Compartments - 2 Door 60 Hz**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Electrolux



**Digital Undercounter**

**Concept Counter Refrigerator - 265 lt, 2  
Compartments - 2 Door 60 Hz**

727050 (HB2PA60)

2-door refrigerated  
counter, -2/+10°C, AISI 304

**Short Form Specification**

**Item No.** \_\_\_\_\_

Internal and external doors, front and side panels and worktop in 304 AISI stainless steel. N.2 doors. Built-in refrigeration unit. Ventilated. Refrigerant R404a. High-density expanded polyurethane foam, 50 mm in thickness, with cyclopentane injection. Digital control panel. Completely automatic defrosting and automatic evaporation of defrost water obtained by hot gas. Suitable to operate in ambient temperatures up to +43°C. Temperature range: -2/+10°C. CFC and HCFC free. Feet in 304 AISI stainless steel, adjustable in height.

Supplied with n. 2x1/1GN Nylon coated steel grids and n. 6 pairs of runners.

**Main Features**

- Suitable for use in ambient temperatures of up to 43 °C.
- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Forced air circulation for rapid cooling and an even temperature distribution.
- IP65 digital control panel allows for temperature and parameter setting as well as to activate defrosting when necessary.
- Completely automatic defrosting and automatic evaporation of defrost water.
- Complies with main international certification bodies and is CE marked.
- Easy to clean reversible door with rounded internal corners.
- Refrigerated compartment designed to accommodate GN 1/1 containers on 6 levels.
- High-density expanded polyurethane insulating foam, 50 mm in thickness, with cyclopentane injection for long-term insulation and energy saving.

**Construction**

- Access to all components from the front.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Full stainless steel construction. Internal structure and worktop in AISI 304 Stainless steel.
- Built-in refrigeration unit.
- 150 mm height-adjustable stainless steel feet.
- Anti-drip profile on stainless steel worktop edge.
- HCFC, CFC and HFC free insulation (Cyclopentane), HCFC and CFC free refrigerant gas (R404a).
- Drain outlet.

**Included Accessories**

- 2 of 1/1GN grey rilsan grid PNC 881435

**Optional Accessories**


- Wheels kit PNC 880025
- Lock kit for refrigerated counters PNC 880130
- Kit 2 stainless steel grids GN1/1 for refrigerated counters PNC 880139
- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- 1/1GN grey rilsan grid PNC 881435
- Printer for HACCP basic version (digital control) PNC 881457

APPROVAL: \_\_\_\_\_



Electrolux

## Digital Undercounter Concept Counter Refrigerator - 265 lt, 2 Compartments - 2 Door 60 Hz

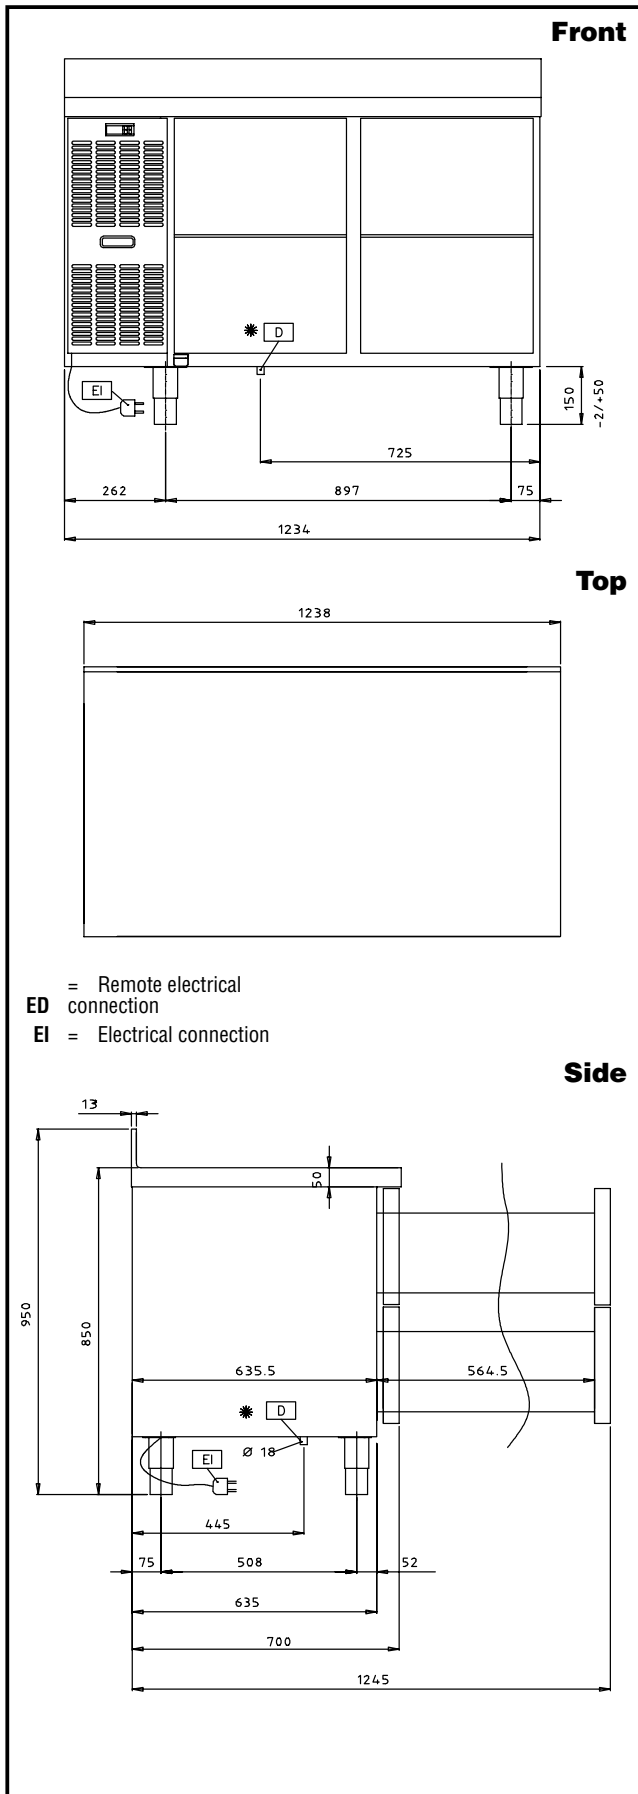

### Electric

Supply voltage:	727050 (HB2PA60)	220 V/1N ph/60 Hz
Electrical power:		0.328 kW

### Key Information:

Door hinges:	1 Left+1 Right
External dimensions, Height:	850 mm
External dimensions, Width:	1238 mm
Number and type of doors:	2 Full
Internal Dimensions (depth):	580 mm
Internal Dimensions (height):	543 mm
Internal Dimensions (width):	
Gross capacity:	265 lt
Net weight:	119 kg
Noise level:	58,5 dBA
Depth with doors open:	1098 mm
Number and type of grids (included):	2 - GN 1/1
<b>Built-in Compressor and Refrigeration Unit</b>	

### Refrigeration Data

Control type:	Digital
Compressor power:	1/4 hp
Refrigerant type:	R404a
Refrigeration power:	953 W
Refrigerant weight:	130 g
Operating temperature min.:	-2 °C
Operating temperature max.:	10 °C
Operating mode:	Ventilated
N° defrost in 24 hrs:	4/20



Digital Undercounter  
Concept Counter Refrigerator - 265 lt, 2 Compartments - 2 Door 60 Hz

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2012.09.28