



# Electrolux

## Modular Cooking Range Line 700XP 2 Door Refrigerated Base

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

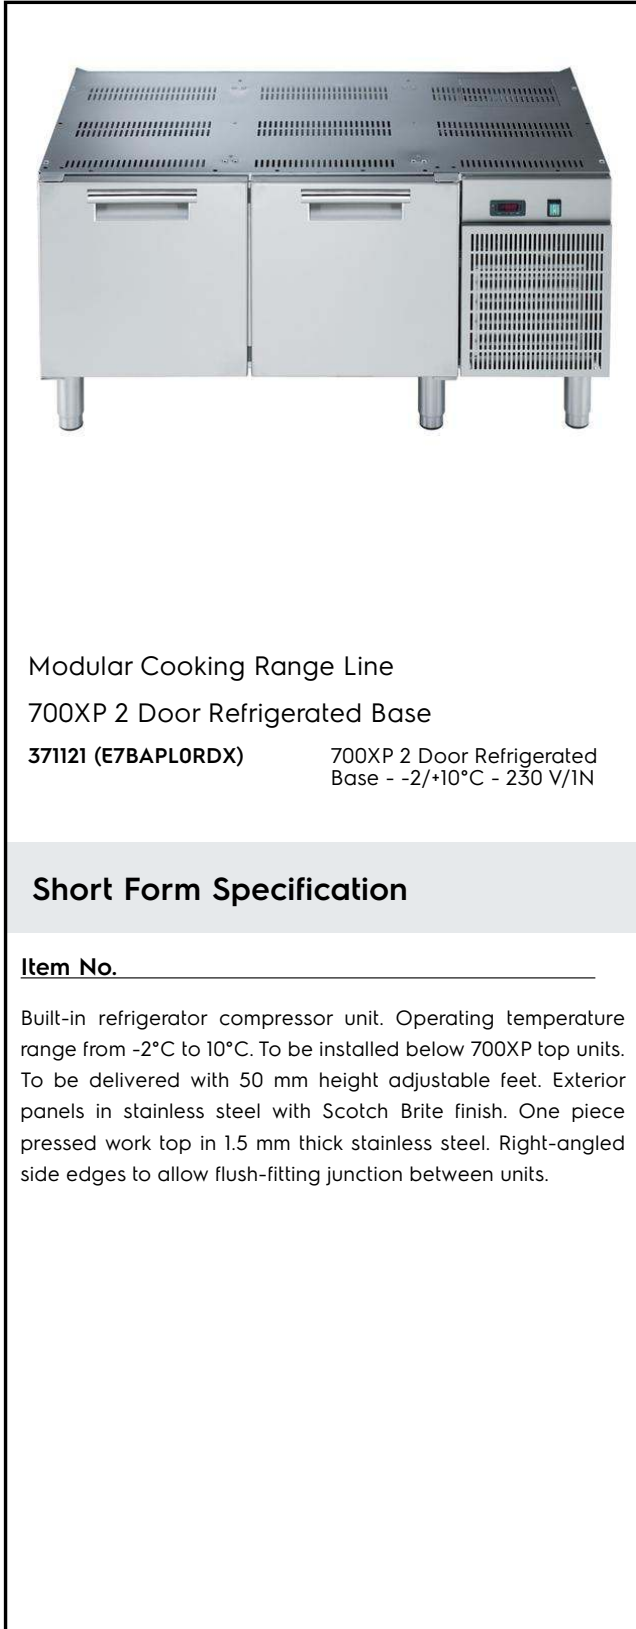
NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Electrolux



Modular Cooking Range Line  
700XP 2 Door Refrigerated Base

371121 (E7BAPLORDX)      700XP 2 Door Refrigerated  
Base - -2/+10°C - 230 V/1N

### Short Form Specification

Item No. \_\_\_\_\_

Built-in refrigerator compressor unit. Operating temperature range from -2°C to 10°C. To be installed below 700XP top units. To be delivered with 50 mm height adjustable feet. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- Unit can be easily installed below other 700 line top models.
- Unit delivered with 50 mm height adjustable feet in Stainless steel.
- Suitable for use in ambient temperatures of up to 43 °C.
- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Anti-tilt runners accept GN 1/1 containers.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Right angled side edges eliminate gaps and possible dirt traps between units.

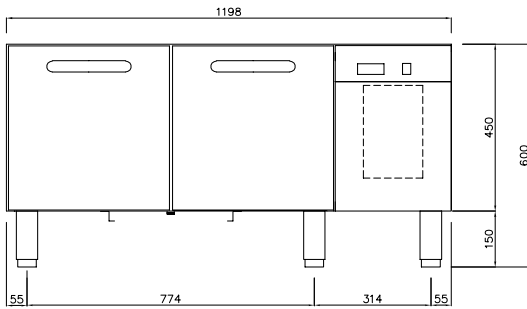
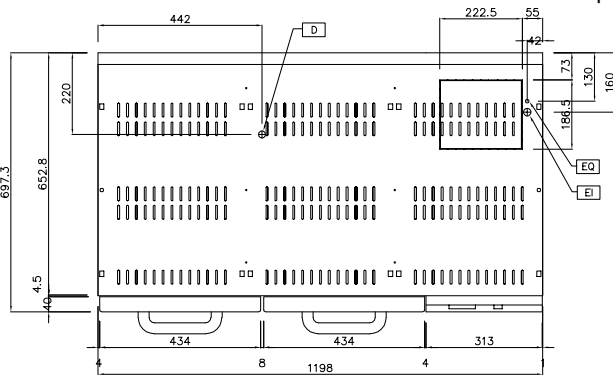
### Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Built-in compressor to suit operating conditions.
- Access to all components from the front.
- CFC free (ecological refrigerant type: R404a, - gas in foam: cyclopentane).


### Optional Accessories

- Kit 4 wheels - 2 swivelling with PNC brake - it is mandatory to install base support and wheels 206135
- Frontal kicking strip, 1200mm (not for refr-freezer base) PNC 206178
- Base support for feet or wheels - PNC 800mm (700/900) 206367
- - NOT TRANSLATED - PNC 206368
- - NOT TRANSLATED - PNC 206371
- Rear paneling - 1200mm (700/900) PNC 206376

APPROVAL: \_\_\_\_\_

**Front**

**Top**


**D = Drain**                      **EQ = Equipotential screw**  
**EI = Electrical connection**

**Side**

**Electric**

**Supply voltage:**  
 371121 (E7BAPLORDX)      230 V/1N ph/50 Hz  
**Electrical power:**      0.5 kW  
**Total Watts:**            0.5 kW

**Key Information:**

**External dimensions, Height:** 600 mm  
**External dimensions, Width:** 1200 mm  
**External dimensions, Depth:** 700 mm  
**Gross capacity:** 152 lt  
**Net weight:** 95 kg  
**Shipping weight:** 116 kg  
**Shipping height:** 820 mm  
**Shipping width:** 800 mm  
**Shipping depth:** 1300 mm  
**Shipping volume:** 0.85 m<sup>3</sup>

**Refrigeration Data**

**Refrigerant type:** R404a  
**Refrigeration power:** 510 W  
**Refrigerant weight:** 400 g