Electrolux

Digital Undercounter 2 Door Refrigerated Table with Splashback, -2+10°C

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



Digital Undercounter

2 Door Refrigerated Table with Splashback, -2+10°C

790159 (HB2PUA63)

2-door refrigerated table with splashback, -2+10°C -220V/1N/60Hz

Short Form Specification

Item No.

The Electrolux range of refrigerated tables combines the convenience of worktop space with cold storage located below. This versatility allows remarkable savings in space while offering a functional and modular solution to any kitchen requirement. The range comprises of counters with a number of compartments, with built-in compressor unit, in various door or drawer configurations. The model detailed in this sheet has two compartments, two full doors is equipped with splashback and operates over the temperature range of -2 °C to 10 °C.

Main Features

- IP65 digital control panel allows for temperature and parameter setting as well as to activate defrosting when necessary.
- Unique airflow design to allow installation against the wall or against other appliances, even on the cooling unit side to maximize the use of kitchen space.
- Refrigerated compartment designed to accommodate GN 1/1 containers.
- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Suitable for use in ambient temperatures of up to 43 ° C.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Completely automatic defrosting and automatic evaporation of defrost water by hot gas.

Construction

- Constructed from the highest quality AISI 304 Stainless steel.
- Fully extractable cooling unit to facilitate maintenance.
- Recessed area in the back to facilitate installation.
- Electronic protection against high voltage peaks.
- Drawers capable of keeping loads up to 53 kg.
- Built-in compressor to suit operating conditions.
- High density polyurethane insulation, 60 mm tickness, HCFC free.
- Mounted on 150 mm adjustable feet.
- · Rounded internal corners for ease of cleaning.
- Anti-drip profile on stainless steel worktop edge.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Access to all components from the front.
- CFC and HCFC free.
- Removable magnetic gasket door with hygienic design.

Door Refrigerated Table with Splashback, -2+10°



Digital Undercounter 2 Door Refrigerated Table with Splashback, -2+10°C

Included Accessories

• 2 of 1x1/1GN PVC grid for counters	PNC 880299	
Optional Accessories		
 Door covering kit for 160lt for undercounter refrigerators (cover panel not included) 	PNC 880145 □	
Lock kit for counters	PNC 880227 🗅	
 Kit integrated HACCP for digital refrigerators (IR33) 	PNC 880252 □	
• 1x1/1GN PVC grid for counters	PNC 880299 🗅	
• Kit of 5 wheels (front with brake) for cabinets and counters	PNC 880301 🗅	
 Kit of 2x½ drawers for counters 	PNC 880305 🗅	
Kit of 3x drawers for counters	PNC 880309 🗖	













Digital Undercounter 2 Door Refrigerated Table with Splashback, -2+10°C

Front +50 150 ΕI 262 897 1234



D = Drain

Electrical connection

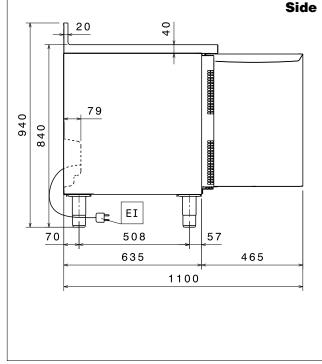

Electric

Supply voltage:

790159(HB2PUA63) 220 V/1N ph/60 Hz

Connected load: 0.35 kW

Key Information:

1 Left+1 Right Door hinges: External dimensions, Height: 940 mm **External dimensions, Width:** 1238 mm **External dimensions, Depth:** 710 mm

External dimensions, Depth with

1098 mm Doors Open: Number and type of doors: 2 **Gross capacity:** 265 It Depth with doors open: 1098 mm

Number and type of grids

2 - GN 1/1 (included):

Refrigeration Data

Compressor power: 1/3 hp Refrigerant type: R404a Refrigeration power: 1139 W Refrigerant weight: 240 g Operating temperature min.: -2 °C Operating temperature max.: 10 °C Type of external material: **304 AISI** Type of internal material: **304 AISI**

